


Fastgrip™

#10



Item #	Description	Head Style	Drill Point	Pcs/Box	Lb/Box
101HL	#10 x 1"	1/4 Hex	T-17	3,000	26.6
10112HL	#10 x 1-1/2"	1/4 Hex	T-17	2,500	27.8
102HL	#10 x 2"	1/4 Hex	T-17	2,000	26.4
10212HL	#10 x 2-1/2"	1/4 Hex	T-17	1,500	23.7
103HL	#10 x 3"	1/4 Hex	T-17	1,000	18.3
104HL	#10 x 4"	1/4 Hex	T-17	500	11.8

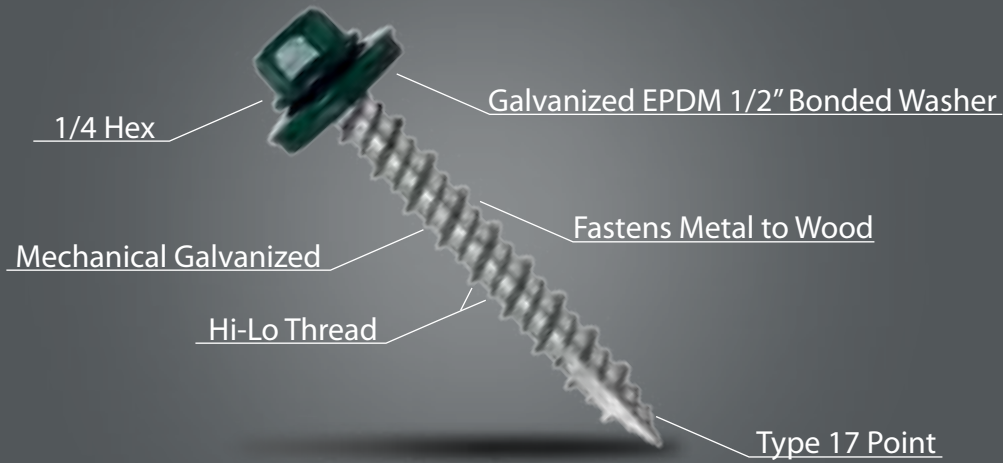

Fastgrip™ Stitch

#12

Item #	Description	Head Style	Drill Point	Pcs/Box	Lb/Box
1234ST	#12 - 14 x 3/4" Stitch	1/4 Hex	SP	3,000	25.9

Technical Data

Pull Out Strength	Substrate	Penetration	Pull Out Strength	Shear
	3/4" Ply	Full	530	1900
	1/2" Ply	Full	305	Tensile
	7/16" OSB	Full	158	2736
	2 x Yellow Pine	1"	986	Torsional
	2 x Spruce Pine Fir	1"	1,023	60
	2 x Spruce Pine Fir	1-1/2"	1,379	

Pull Over Strength	Substrate	Gauge	Thickness	Pull Over Strength
	AZ55 Galvalume	29	0.014	415
	AZ55 Galvalume	26	0.018	560
	AZ55 Galvalume	24	0.024	717


Fastgrip™

MINI-DRILLER

#10



Item #	Description	Head Style	Drill Point	Pcs/Box	Lb/Box
101MD	#10 x 1"	1/4 Hex	RP	3,000	26.8
10112MD	#10 x 1-1/2"	1/4 Hex	RP	2,500	27.9
102MD	#10 x 2"	1/4 Hex	RP	2,000	27.3
10212MD	#10 x 2-1/2"	1/4 Hex	RP	1,500	23.5
103MD	#10 x 3"	1/4 Hex	RP	1,000	19.0

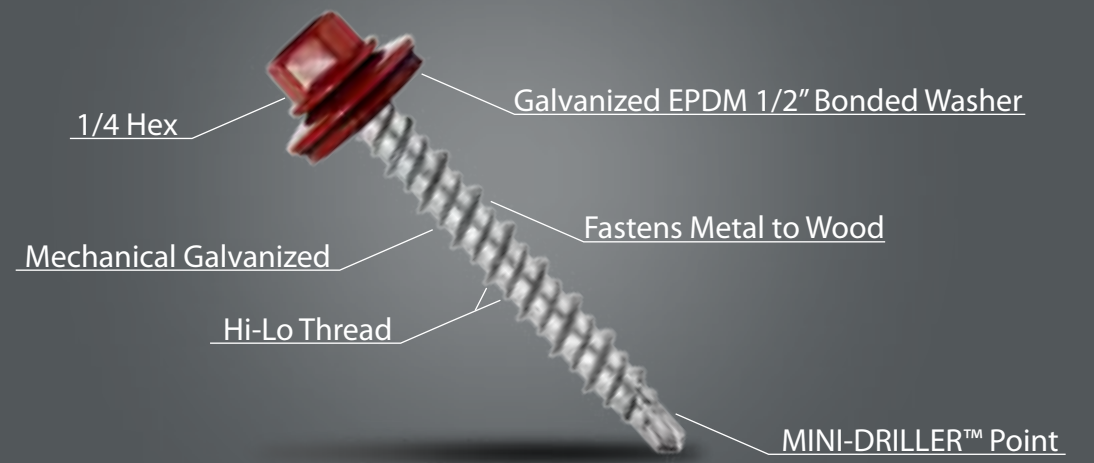

Technical Data

Pull Out Strength	Substrate	Penetration	Pull Out Strength	Shear
	3/4" Ply	Full	525	1750
	1/2" Ply	Full	280	Tensile
	7/16" OSB	Full	217	2486
	2 x Yellow Pine	1"	850	Torsional
	2 x Spruce Pine Fir	1"	787	80
	2 x Spruce Pine Fir	1-1/2"	1,285	

Pull Over Strength	Substrate	Gauge	Thickness	Pull Over Strength
	AZ55 Galvalume	29	0.014	398
	AZ55 Galvalume	26	0.018	667
	AZ55 Galvalume	24	0.024	767




#9 Stainless Steel

#9



Item #	Description	Head Style	Drill Point	Pcs/Box	Lb/Box
91SS	#9 x 1"	1/4 Hex	SP	3,000	24.2
9114SS	#9 x 1-1/4"	1/4 Hex	SP	2,500	22.7
9112SS	#9 x 1-1/2"	1/4 Hex	SP	2,500	26.1
92SS	#9 x 2"	1/4 Hex	SP	2,000	24.7
9212SS	#9 x 2-1/2"	1/4 Hex	SP	1,500	22.3
93SS	#9 x 3"	1/4 Hex	SP	1,000	17.5

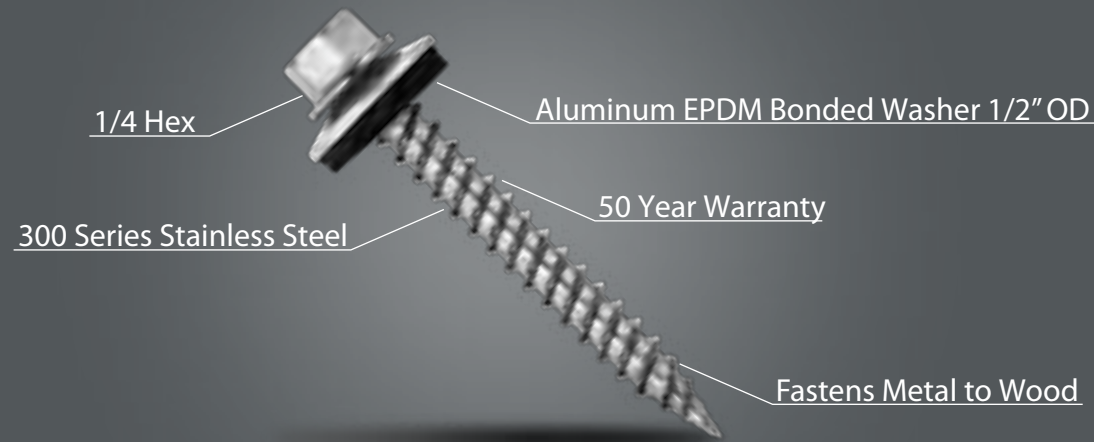


#14

#14



Item #	Description	Head Style	Drill Point	Pcs/Box	Lb/Box
141FG	#14 x 1"	5/16 Hex	T-17	2,000	28.6
14112FG	#14 x 1-1/2"	5/16 Hex	T-17	1,500	27.8
142FG	#14 x 2"	5/16 Hex	T-17	1,000	23.4
14212FG	#14 x 2-1/2"	5/16 Hex	T-17	500	14.2

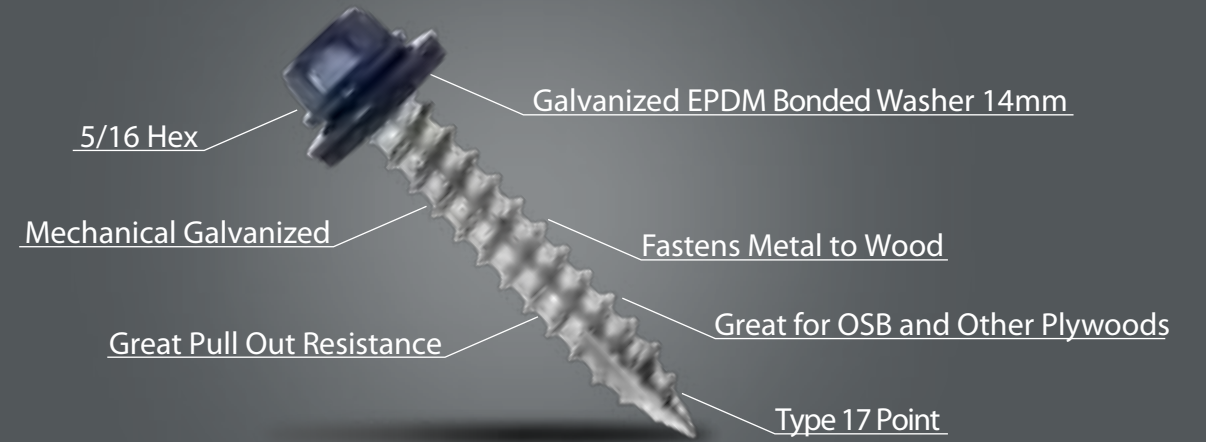

Technical Data

Pull Out Strength	Substrate	Penetration	Pull Out Strength	Shear
	3/4" Ply	Full	465	1,280
	1/2" Ply	Full	327	Tensile
	7/16" OSB	Full	180	1,455
	2 x Yellow Pine	1"	894	Torsional
	2 x Spruce Pine Fir	1"	692	52
	2 x Spruce Pine Fir	1-1/2"	1,264	

Pull Over Strength	Substrate	Gauge	Thickness	Pull Over Strength
	AZ55 Galvalume	29	0.014	411
	AZ55 Galvalume	26	0.018	567
	AZ55 Galvalume	24	0.024	788

Technical Data

Pull Out Strength	Substrate	Penetration	Pull Out Strength	Shear
	3/4" Ply	Full	621	2,980
	1/2" Ply	Full	449	Tensile
	7/16" OSB	Full	209	4,492
	2 x Yellow Pine	1"	992	Torsional
	2 x Spruce Pine Fir	1"	1,294	175
	2 x Spruce Pine Fir	1-1/2"	1,597	

Pull Over Strength	Substrate	Gauge	Thickness	Pull Over Strength
	AZ55 Galvalume	29	0.014	535
	AZ55 Galvalume	26	0.018	743
	AZ55 Galvalume	24	0.024	1,052

