


---

# STRONG RIB

## 29 Gauge Roofing, Siding Panel, "AG" Panel

- Minimum 3/12 roof pitch required.
- Also available in 26 gauge.
- 45' maximum length.

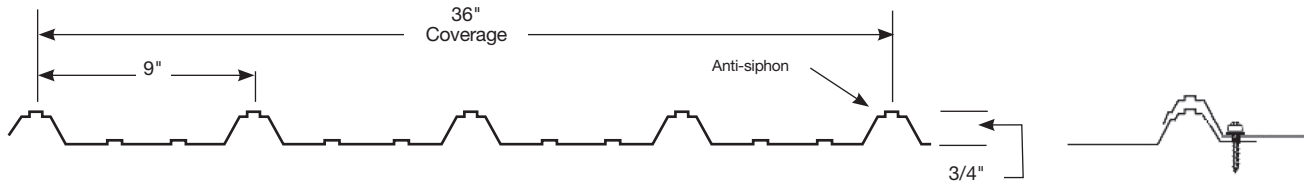

---

# STRONG SPAN

## 26 Gauge Roofing And Siding Panel "PBR" or "R" Panel

- Strong Span will span up to 5' purlin spacing on roof application.
- "Purlin Bearing Rib" as shown below to provide for roof application.
- Minimum 1/12 roof pitch required (Butyl tape is required on all roof applications, less than 3/12 pitch requires 1" Butyl tape and Stitch screws).
- Also available in 24 gauge (White and Galvalume only).
- 43' maximum length.



---

# LOCK SEAM

## Concealed Fastener Roof Panel

- Standard is 26 gauge.
- Rib height 1.5".
- Panel width is 16" coverage.
- Nail strip panel shown.
- Minimum 3/12 roof pitch required.
- Solid decking is required, 5/8" minimum.
- 35' maximum length.

